BMP HIGH SPEED DOORS



DynamicRoll® ONE

EPD® THE INTERNATIONAL EPD® SYSTEM

TÜV SÜD

TECHNICAL DATA


HIGH SPEED
Up to 1,2 m/s


SAFE


SELF-REPAIR


OIL FREE


GRAVITY
TECHNOLOGY

MAXIMUM DIMENSIONS	**W** 3000 mm x **H** 3500 mm
SPEED	**Max opening speed** up to 1,2 m/s
	Closing speed 0,8 m/s adjustable
CYCLES TEST	1.000.000
WIND RESISTANCE	Class 1
STRUCTURE	Not self-supporting
FRAME / MOTOR COVER HOOD	**Standard** Galvanized steel
	Optional • Powder coated steel • Stainless steel 441/316
CURTAIN	**Standard** PVC curtain 900 gr/m²
	Optional • Insulated • Translucent 35/40% • FDA (white) • Antistatic
SLIDING SYSTEM	Patented sliding system with high density Polyzene self- lubricant equipped of sliding zipper directly on curtain
CONTROL PANEL **INTEGRATED**	**Standard** • Power supply 1-ph, 230V max 16A • Start/Stop button
	Optional • 2 free contacts (door open / closed / alarm) • Automatic / manual interlocking between 2 doors
WIRING	Plug and Play system IP65
SAFETIES	**Standard** • Photocells set IP65 • Anti-jam sensor reverse
	Optional Multi ray light curtain barrier H 2500 IP67
EMERGENCY OPENING	**Standard** Hand crank
	Optional • Chain system • Counterweight system • UPS battery
ADVISING OPERATIVE TEMPERATURE	Operating till positive temperature (> 0°C) - Not apt to be installed in negative/positive temperature

DynamicRoll® one is a self-repairing roll up equipped with the DynamicRoll® zipper system.
The integrated motor box eliminates costly and unaesthetic electrical and control panel piping.
Its patented sliding system allows the door to work in complete safety: in case of accidental collisions, the curtain comes out from the guides and reinserts to the next cycle.

Standard model has neither top cover hood nor motor hood

For more information, download the complete datasheet

CLICK HERE

PVC CHARACTERISTICS

STANDARD PVC

Composition and tests

EXTERNAL SIDE			
Material	*Finishing*	*Color*	*Thick*
PVC	Opaque	18 standard	0,7 mm
FABRIC			
Material	*N. tarps*	*Title*	*EN 2286-2*
PES	1	1100Dtex 12x12	900 g/m²
INTERNAL SIDE			
Material	*Finishing*	*Color*	*Thick*
PVC	Rough	18 standard	0,2 mm

Characteristics

THICK
ISO 2286/3
(mm) 0,9±0,1

WEIGHT
ISO 2286/2
(kg/m2) 0,90±0,1

Colors



Translucent Insulated available Antistatic available

FDA CERTIFICATED PVC

Food Drug Administration

TECHNICAL DATA

Composition and tests

TOP FACE COATING			
Material	*Finish*	*Color*	*Thickness*
PUR	Opaque	White	0,6 mm
FABRIC			
Material	*N. tarps*	*Title*	*EN 2286-2*
PET	1	2200 Dtex 12x12	1500 g/m²
UNDERSIDE COATING			
Material	*Finish*	*Color*	*Thickness*
PUR	Plain	White	0,6 mm

Characteristics

THICKNESS
ISO 2286/3
(mm) 1,20±0,1

WEIGHT
ISO 2286/2
(kg/m2) 1,30±0,1

TENSILE STRENGTH WARP
ISO 1421
6000 N / 50mm

Disclaimer

The information contained in this document describes the features of the BMP EUROPE product as tested in a laboratory, other indications excepted, environment at a temperature of +23 degrees °C at 50% relative humidity. It does not necessarily reflect the conditions of industrial use and it does not guarantee the product to be suitable for certain applications. The client remains liable for the proper selection and correct use of the BMP EUROPE product. BMP EUROPE cannot be held responsible should

CRISTAL CHARACTERISTICS

PVC SUPERCLEAR

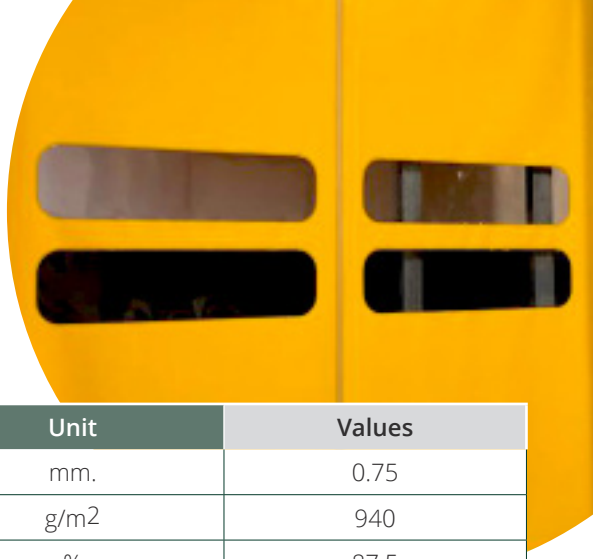

SUITABLE ONLY FOR POSITIVE TEMPERATURE ENVIRONMENTS

WINDOWS - *CRISTAL*

TECHNICAL DATA

Article	SUPERCLEAR 0.75 mm FR

Technical specifications	Standards	Unit	Values
Thickness	-	mm.	0.75
PVC total weight	-	g/m2	940
Light transmission	JIS K - 7361	%	87.5

OPTIONAL ACCESSORIES

RADAR



OPENING POINT RADAR TOF/SPOT for internal use only



INFRARED RADAR with cross-movement adjustment



INFRARED RADAR motion and presence (pedestrian/forklift) radar

TRAFFIC LIGHTS



GREEN FIXED STANDARD traffic light



RED FIXED STANDARD traffic light



LED TRAFFIC LIGHT with countdown



LED TRAFFIC LIGHT BARRIERS (connection card included)

BUTTONS



OPENING GREEN BUTTON with box



OPENING BLACK BUTTON with box



FREEZE STOP BUTTON with box



NO TOUCH BUTTON



TRAFFIC LIGHT BUTTON DUAL-FUNCTION opening and intermittent door opening/closing signaling



WIND GAUGE



KEY SELECTOR



REMOTE CONTROL



BOLLARD B-PROTECT



PULL CORD SWITCH



MAGNETIC LOOP DETECTOR

Quality products since 1997

BMP EUROPE HIGH SPEED DOORS
Strada della Freisa 1 - Villanova d'Asti 14019 (AT)
+39 0141 948843
www.bmpdoors.com - info@bmpeurope.eu

09/2026